


# Aluminum Diamond Tread Hand Truck Dock Board with Curbs 95-7/8 In. x 37-1/4 In. x 19-1/8 In. 800 Lb. Capacity Silver

**MODEL AHTD-3696**

Loading Dock Equipment / Aluminum Hand Truck Dockboards

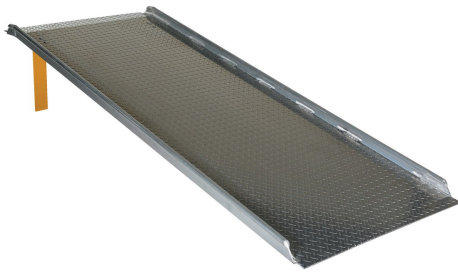

## PRODUCT OVERVIEW

The Aluminum Hand Truck dock boards are lightweight and can be carried and positioned by one person. Provides a safe and convenient bridge between dock and truck. Welded aluminum diamond tread surface and beveled edges provide safe and smooth entry and exit. The bend is designed to keep ramp edges flush with the dock surface and the truck floor. The unit is equipped with bolt-on locking legs and full length aluminum curbs that provide hand holds and reduce chance of roll off. Designed for use with two wheel hand trucks.

## KEY FEATURES

- Lightweight design is ideal for foot or hand truck traffic
- Beveled entrance and exit edges provide smooth transition
- Tread plate surface ensures skid-resistant safe traction
- Bolt-on locking legs and lifting handles for OSHA compliance

## CORE PRODUCT DATA

**ASSEMBLED WEIGHT**  
**101 lbs**

**ASSEMBLED SIZE**  
**37.25" W x 95.875" L x 19.125" H**

**SHIP WEIGHT**  
**107 lbs**

**PACKAGE 1 SIZE**  
**36" W x 96" D x 17" H**

**COLOR / FINISH**  
**Silver**



**FREIGHT TYPE**  
**LTL Palletized**

**AVAILABILITY** Available

**QUICKSHIP:** --

Products are sold through Vestil distributor partners. Contact a distributor for current pricing and ordering.

## ADDITIONAL PRODUCT VIEWS



PRODUCT SPECIFICATIONS

|                                              |             |
|----------------------------------------------|-------------|
| Uniform Capacity (lb.)                       | 800         |
| Bend or Crown (degrees)                      | 12          |
| Distance Between Bend or Crown From Dockplat | 6           |
| Height Differential (in.)                    | 19          |
| Plate Thickness (in.)                        | 3/16        |
| Usable Width (in.)                           | 34          |
| Usable Length (in.)                          | 95-7/8      |
| OSHA                                         | 1910.30 (a) |
| ANSI                                         | MH 30.2     |

PRODUCT & SHIPPING REFERENCE

Shipping Point: Angola, IN 46703

Warranty: 90 Days

AVAILABLE PRODUCT RESOURCES



SCAN FOR CURRENT PRODUCT DATA